

TAIKAN COMPREHENSIVE PRODUCT MANUAL

HIGH-END INTELLIGENT EQUIPMENT
TURNKEY SOLUTION SERVICE PROVIDER

Taikan

HIGH-END INTELLIGENT EQUIPMENT TURNKEY SOLUTION SERVICE PROVIDER

All pictures in this brochure are for reference only, and the actual delivery shall prevail.
Our company's products are constantly improving, and the above information is subject to change without prior notice.

SHENZHEN CREATE CENTURY AUTOMATION TECHNOLOGY CO., LTD.

Address: Room 201 Building 2, No. 180 Huangpu East Ring Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, China

Tel.: +86(755)2996-5778

E-mail: overseas-marketing@szccm.com

Website: www.taikanmachine.com



COMPANY PROFILE

Guangdong Create Century Intelligent Equipment Group Co., Ltd. (Create Century, Stock code: 300083) was listed on the Shenzhen Stock Exchange in 2010 and transformed into Intelligent Equipment Co., Ltd. in 2016 . The company is a national high-tech enterprise of intelligent equipment, integrating R&D, production, sales and service. With nearly 20 years of industry experience, it can provide customers with high-quality equipment and intelligent solution service. It is one of the companies with the most complete technology and the widest product range among similar domestic companies.

4

R&D centers

Shenzhen R&D center
Suzhou R&D center
Shanghai R&D center
Xi'an R&D center

4

Strategic partnership agencies

ONE STATION, ONE LAB, AND TWO CENTERS
Academician <Expert> Workstation of Shenzhen
Engineering Technology Research Center of Guangdong Province
Engineering Laboratory for Key Technologies in Smart Precision Machining
Enterprise Technology Center of Shenzhen

500⁺

R&D Team

The Company boasts a technical advisory board consisting of industry-leading technical experts from Mainland China, Taiwan, South Korea, Malaysia, Germany, and other regions, along with a dedicated R&D team of over 500 professionals.

700⁺

Core patents

Invention patent-----168 Pcs
Utility model patent -----509 Pcs
Appearance patent -----121 Pcs
Software copyright -----88 Pcs



CONTENTS

Founded **20** years ago ◆
Create Century established in 2005

Ranking **183**rd ◆
Shenzhen's Top 500 Enterprises in 2023

Top **100** businesses ◆
Bao'an District, Shenzhen
Top 100 enterprises by added value
Top 100 enterprises by output value
Top 100 enterprises by tax contribution
Top 100 enterprises by innovation

Vertical Machining Center

S series
DT series
H series

M series
L Series
T-V Series

Drilling & Tapping Machining Center

B Series
S Series

SE Series

Profile Machining Center

T Series
V Series

G Series

Horizontal Machining Center

DH Series
DHS Series

T-H Series

Five-Axis Machining Center

V-U Series

FH Series

Gantry Machining Center

G-V Series
G-R Series
G-M Series

G-B Series
G-VU Series
G-BU Series

Engraving Processing Machine

Single-spindle Engraving Processing Machine
Multi-channel Engraving Processing Machine
Multi-spindle Engraving Processing Machine
Dual-spindle Processing Machine

CNC Lathe

L-M Series
L-Y Series
L-H Series

L-P Series
D-VL Series

CNC Slitting Lathe

ST Series
TQ Series

L-S Series

Vertical Machining Center

S Series Standard Edition Vertical Machining Center
DT Series Efficiency Vertical Machining Center
H Series Advanced Edition Vertical Machining Cente

M Series Excellent Rigidity Vertical Machining Center
L Series Two-linear And One Hard Vertical Machining Center
T-v Series Light Cutting Vertical Machining Center

S Series | Standard Edition With Three Linear Guide Rails Vertical Machining Center

High-speed and high-efficiency—A classic masterpiece

- A variety of operating systems and spindle options are available for customers to choose from, allowing for a comprehensive satisfaction of their specific needs.



Item	Unit	T-V856S	T-V1055S	T-V1165S	T-V1270S	T-V1375S	T-V1475S	T-V1585S	T-V1685S
Table size	mm	1,000×500	1,100×500	1,200×600	1,300×650	1,500×750	1,500×750	1,700×850	1,700×850
X/Y/Z axis travel	mm	800/550/600	1,000/550/600	1,100/650/600	1,200/700/700	1,350/750/750	1,400/750/750	1,550/850/850	1,650/850/850
Spindle speed	r/min	Direct coupling 12,000	Direct coupling 12,000	Direct coupling 12,000	Direct coupling 12,000	Belt 6,000	Belt 6,000	Belt 6,000	Belt 6,000
Tool shank	/	BT40	BT40	BT40	BT40	BT50	BT50	BT50	BT50
Tool capacity	PCS	24	24	24	24	24	24	24	24

DT Series | High Rigidity & High Efficiency Vertical Machining Center

High speed, high efficiency and high precisiona

- Extra large base design enables stable cutting for long time.
- Quick tool interchange and high-speed cutting enable high productivity.

Item	Unit	DT50	DT55
Table size	mm	1100×450	1200×500
X/Y/Z axis travel	mm	850/500/500	1050/550/550
Spindle speed	r/min	Direct coupling 12,000	Direct coupling 12,000
Tool shank	/	BBT40	BBT40
Tool capacity	PCS	30	30



H Series | Advanced Edition With Three Linear Vertical Machining Center

High speed and high precision—A testament to exquisite craftsmanship

- Faster and more precise tool change saves time.
- Suitable for the machining of workpieces with high precision requirements and moderate chip volume.

Item	Unit	T-V856H	T-V1165H
Table size	mm	1,000×500	1,200×600
X/Y/Z axis travel	mm	800/550/600	1,100/650/600
Spindle speed	r/min	Direct coupling 12,000	Direct coupling 12,000
Tool shank	/	BT-40	BT-40
Tool capacity	PCS	24	24



M Series | Excellent Rigidity Vertical Machining Center

High speed and high rigidity – A masterpiece for heavy-duty cutting operations

- A design featuring an exceptionally massive and robust base structure, impeccable rigidity and stability.
- Belt-driven 8000 RPM spindle offering high cutting rigidity.



Item	Unit	T-V850M	T-850LM	T-V1165M	T-1165LM
Table size	mm	1,000×550	1,000×550	1,200×650	1,200×650
X/Y/Z axis travel	mm	850/550/550	850/520/550	1,100/650/600	1,100/650/600
Spindle speed	r/min	Belt 8,000	Belt 8,000	Belt 8,000	Belt 8,000
Tool shank	/	BT-40	BT-40	BT-40	BT-40
Tool capacity	PCS	24	24	24	24

L Series | Two Linear And One Hard Vertical Machining Center

High precision and high efficiency –An outstanding masterpiece

- XY axis linear guide rails and Z axis box guideway combine high speed and high rigidity.
- Equipped with a belt spindle, it has excellent heavy-duty cutting performance.



Item	Unit	T-856L	T-1060L	T-1260L	T-1375L	T-1475L	T-1585L	T-1685L
Table size	mm	1,000×500	1,200×600	1,300×600	1,500×750	1,500×750	1,700×850	1,700×850
X/Y/Z axis travel	mm	800/500/600	1,050/600/570	1,200/600/570	1,350/750/750	1,400/750/750	1,550/850/850	1,650/850/850
Spindle speed	r/min	Belt 8,000	Belt 8,000	Belt 8,000	Belt 6,000	Belt 6,000	Belt 6,000	Belt 6,000
Tool shank	/	BT40	BT40	BT40	BT50	BT50	BT50	BT50
Tool capacity	PCS	24	24	24	24	24	24	24

T-V Series | Light Cutting Vertical Machining Center

High speed and light & fast cutting – A masterpiece of high efficiency

- The specification of X-axis ranges from 600 mm to 2000 mm, ensuring versatility across multiple machine models to cater to a wide range of requirements.

Item	Unit	T-V6	T-V16	T-V18	T-V20
Table size	mm	700×400	1,700×650	1,900×650	2,000×650
X/Y/Z axis travel	mm	600/390/450	1,600/650/590	1,800/650/590	2,000/650/590
Spindle speed	r/min	Direct coupling 12,000	Direct coupling 12,000	Direct coupling 12,000	Direct coupling 12,000
Tool shank	/	BT40	BT40	BT40	BT40
Tool capacity	PCS	24	24	24	24



All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.

Drilling & Tapping Machining Center

B Series Drilling & Tapping Machining Center
S Series Drilling & Tapping Machining Center
SE Series Drilling & Tapping Machining Center

B Series | Drilling & Tapping Machining Center

High-speed High-efficiency High-precision

- The machine has various specifications with X-axis travel from 500mm to 2,000mm, which can meet various machining requirements.
- Equipped with direct-spindle and motorized spindle options, with maximum speeds of 12,000rpm, 2,000rpm, and 24,000rpm.
- 21T/26T/30T/40T tool magazine options improve tool handling capabilities and promote process intensiveness.
- It is particularly good at 3C (computer, communication, and consumer electronics) parts processing, and is also widely used in milling, drilling, and tapping processing of parts in various industries.



Item	Unit	T-500B	T-500BH	T-500B Plus	T-600B	T-700B
Table size	mm	620×400	620×400	620×400	700×400	800×400
X/Y/Z axis travel	mm	500/400/320	500/400/460	500/400/320	600/390/320	700/400/320
Spindle speed	r/min	20-24,000	20-24,000	20-20,000	20-20,000	20-20,000
Tool shank	/	BT30	BT30	BT30	BT-30	BT-30
Tool capacity	PCS	21	21	21	21	21
X/Y/Z axis rapid traverse speed	m/min	48/48/48	48/48/48	48/48/48	48/48/48	48/48/48

Item	Unit	T-1000	T-1200	T-1300	T-1600	T-1800	T-2,000
Table size	mm	1,200×600	1,300×650	1,300×650	1,700×650	1,900×650	2,000×650
X/Y/Z axis travel	mm	1,100/650/410	1,200/650/410	1,300/650/410	1,600/650/475	1,800/650/475	2,000/650/475
Spindle speed	r/min	20-20,000	20-20,000	20-20,000	20-20,000	20-20,000	20-20,000
Tool shank	/	BT-30	BT-30	BT-30	BT-30	BT-30	BT-30
Tool capacity	PCS	21	21	21	21	21	21
X/Y/Z axis rapid traverse speed	m/min	36/36/36	36/36/36	36/36/36	30/36/36	30/36/36	27/36/36

S Series | Drilling & Tapping Machining Center

Unmatched value for money Exceptional stability High reliability

Item	Unit	T-500S	T-600S	T-700S	T-800S	T-1,000S	T-1200S	T-1600S
Table size	mm	620×400	700×400	800×400	1,000×500	1,100×500	1,300×550	1,700×550
X/Y/Z axis travel	mm	500/400/320	600/400/320	700/400/320	800/500/450	1,000/500/450	1,200/550/450	1,600/550/450
Spindle speed	r/min	20-24,000	20-24,000	20-24,000	20-20,000	20-20,000	20-20,000	20-20,000
Tool shank	/	BT30	BT-30	BT-30	BT-30	BT-30	BT-30	BT-30
Tool capacity	PCS	21	21	21	21	21	21	21
X/Y/Z axis rapid traverse speed	m/min	48/48/48	48/48/48	48/48/48	48/48/48	48/48/48	36/36/36	30/36/36




Profile Machining Center

T Series Moving Column Profile Machining Center
V Series Moving Column Profile Machining Center
G Series Gantry Profile Machining Center

T Series | Moving Column Profile Machining Center

BT30 (Tilt-disc Tool Magazine)

- Fixed table, column-moving structure; equipped with a BT30 direct-drive spindle and 21T tilt-disc tool magazine, enabling high-speed tool change.
- With a maximum X-axis travel of 6,500 mm and a rapid traverse speed of up to 50 m/min, this machine is designed for processing large, narrow, and long workpieces.
- The X-axis can be optionally driven by either a rack-and-pinion or a ball screw drive.

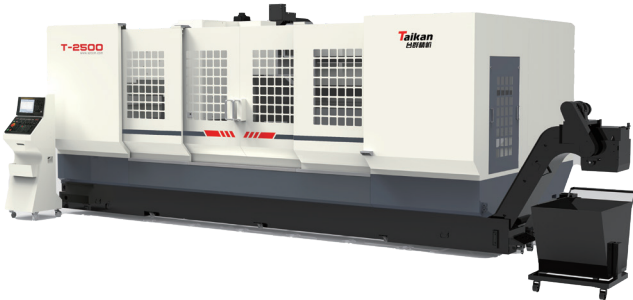


Item	Unit	T-2500	T-4500	T-6500
Table size	mm	2,500×400	4,500×400	6,500×400
X/Y/Z axis travel	mm	2,500/400/350	4,500/400/350	6,500/400/350
Max. spindle speed	r/min	12,000	12,000	12,000
Tool holder specifications	/	BT30	BT30	BT30
Tool capacity	PCS	21	21	21
X/Y/Z axis rapid traverse speed	m/min	50/30/36	50/30/36	50/30/36

V Series | Moving Column Profile Machining Center

BT 40 (disc type magazine)

- Fixed table, column-moving structure; equipped with a BT40 direct-drive spindle and 24T disc tool magazine.
- With a maximum X-axis travel of 6,500 mm and a rapid traverse speed of up to 50 m/min, this machine is designed for processing large, narrow, and long workpieces.
- The X-axis can be optionally driven by either a rack-and-pinion or a ball screw drive.

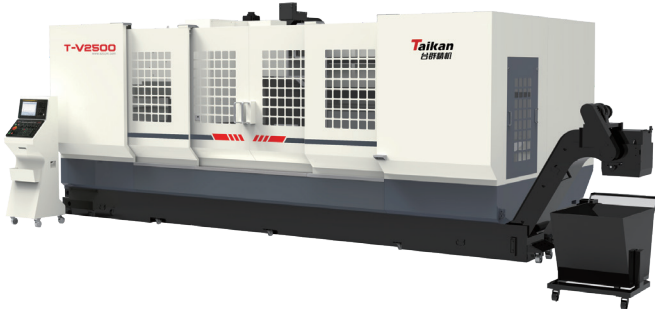

Item	Unit	T-V2500	T-V4500	T-V6500
Table size	mm	2,500×550	4,500×550	6,500×550
X/Y/Z axis travel	mm	2,500/550/550	4,500/550/550	6,500/550/550
Max. spindle speed	r/min	12,000	12,000	12,000
Tool holder specifications	/	BT40	BT40	BT40
Tool capacity	PCS	24	24	24
X/Y/Z axis rapid traverse speed	m/min	50/28/28	50/28/28	50/28/28

G Series | Gantry-Type Profile Machining Center

Fast speed, high efficiency and excellent cost performance

- Lightweight dynamic gantry design, rapid response speed, wide machining range, high machining efficiency
- Applied to the processing of large flat parts such as new energy vehicle battery tray assembly.



Item	Unit	G-M2518L	G-M2030L	G-M2015X	G-M2030U
Table size	mm	2,500×1,800	2,000×3,000	2,000×1,500	2,000×3,000
X/Y/Z axis travel	mm	1,800/2,500/500	3,000/2,000/600	1,500/2,000/450	3,000/2,000/800
Max. spindle speed	r/min	12,000	12,000	12,000	20,000
Tool holder specifications	/	BT40	BT40	BT40	HSK-A63
Tool capacity	PCS	24	24	20	24
X/Y/Z axis rapid traverse speed	m/min	36/36/36	40/30/30	36/36/36	40/30/30

All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.

Horizontal Machining Center

DH Series Horizontal Machining Center
T-H Series Horizontal Machining Center
DHS Series Horizontal Machining Center

DH Series | Horizontal Machining Center

- High-rigidity positive T-type bed structure, equipped with double worktable APC device and double servo motor tool magazine to improve efficiency.

Item	Unit	DH-63
Pallet size	mm	630×630
X/Y/Z three-axis travel	mm	1,050/800/1,000
Max. workpiece size	mm	∅ 1,000×1,000
Max. spindle speed	r/min	10,000
Tool holder specifications	/	BT50
Tool capacity	T	60



DHS Series | Horizontal Machining Center

- High rigidity inverted T-type column-moving structure with a spacious machining area design, ideal for multi-sided machining of large box-type components.

Item	Unit	DH-100S
Table size	mm	1,000×1,250
X/Y/Z three-axis travel	mm	2,000/1,300/1,200
Max. workpiece size	mm	∅ 2,000×1,800
Max. spindle speed	r/min	10,000
Tool holder specifications	/	BT50
Tool capacity	T	40



T-H Series | Horizontal Machining Center

- Column-fixed cross slide structure, compact and fast

Item	Unit	T-H8	T-H11	T-H13
Table size	mm	400×400	500×500	630×630
X/Y/Z three-axis travel	mm	800/650/650	1,100/600/650	1,350/850/750
Max. workpiece rotation diameter	mm	∅ 900	∅ 1,200	∅ 1,450
Max. spindle speed	r/min	12,000(Direct coupling)	12,000(Direct coupling)	6,000(Belt)
Tool holder specifications	/	BT40	BT40	BT50
Tool capacity	T	24	24	24



Five-Axis Machining Center

V-U Series Vertical Five-axis Machining Center
FH Series Five-axis Milling And Turning Machine

V-U Series | Vertical Five-axis Machining Center

- V-200U/V-400U: O-shaped fixed beam gantry structure, direct-drive single-arm rotary table, high-speed motorized spindle, suitable for small complex workpieces or spatial curved surface machining.
- V-500U/V-650U/V-800U: overhead traveling beam structure, direct-drive cradle rotary table, high-speed motorized spindle, suitable for general complex workpieces or spatial curved surface machining.


Item	Unit	V-200U	V-400U	V-500U	V-650U	V-800U
Table size	mm	∅ 260	∅ 420	∅ 500×445	∅ 650×530	∅ 800×630
X/Y/Z axis travel	mm	500/280/300	700/450/400	500/650/450	650/800/500	850/900/580
Max. spindle speede	r/min	30,000	24,000	20,000	18,000	16,000
Spindle power	kW	11	16	20	30	30
Tool holder specifications	/	HSK E40	HSK E50	HSK A63	HSK A63	HSK A63
Tool capacity	T	30	24	40	40	40



FH Series | Five-axis Milling And Turning Machine

- The bed is made of marble, which is less affected by temperature changes and has good vibration absorption.
- The direct-drive B-axis swing head is equipped with a high-torque spindle that can be converted between vertical and horizontal positions, which can realize side machining, top surface machining, inclined surface machining and five-axis linkage machining.
- The direct-drive C-axis rotary table can complete milling and turning machining in one clamping.

Item	Unit	FH60P-C	FH80P-C	FH100P-C	FH135P-C	FH170P-C	FH210P-C
Table size	mm	∅ 660	∅ 880	∅ 1,100	∅ 1,400	∅ 1,700	∅ 1,800
X/Y/Z axis travel	mm	600×800×600	800×1,050×800	1,000×1,150×1,000	1,450×1,450×1,000	1,700×1,700×1,100	2,100×2,100×1,300
Max. spindle speede	rpm	12,000	12,000	12,000	12,000	10,000	10,000
Spindle power	kW	42	42	58	58	71	71
Tool holder specifications	/	HSK-A63	HSK-A63	HSK-A100	HSK-A100	HSK-A100	HSK-A100
Tool capacity	T	40	40	40	40	40	40

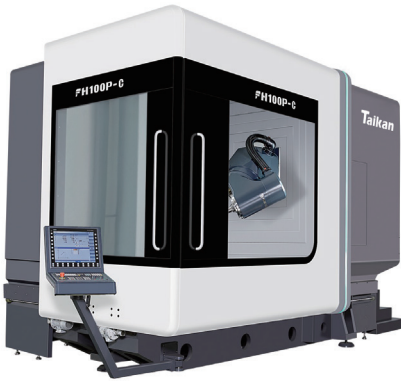

All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.

Double Column Machining Center

G-V Series Three-Linear Double Column Machining Center
G-R Series Z-axis Square Ram Box Guideway
G-M Series Moving Column Double Column Machining Center

G-B Series Bridge-type Double Column Machining Center
G-VU Series Fixed Beam Five-axis Double Column Machining Center
G-BU Series Bridge-type Five-axis Double Column Machining Center

G-V Series | Three-linear Guide Double Column Machining Center

Direct-connected spindle model

- Movable worktable design with fixed column and crossbeam; X, Y, and Z axes all use linear guides.
- Standard equipped with high-speed direct-connected spindles.



Item	Unit	G-V1220D/V1225D/V1230D	G-V1630D
X-axis travel	mm	2,100/2,600/3,150	3,150
Y-axis travel	mm	1,500+25 (Tool change travel)	1,800
Z-axis travel	mm	700	700
Effective door width	mm	1,560	1,800
Worktable width	mm	1,250	1,800
Worktable length	mm	2,000/2,500/3,000	3,000
Tool holder specifications	/	BBT40/BT40	BBT40/BT40
Max. spindle speed	r/min	12,000 (Direct coupling)	12,000 (Direct coupling)
Spindle motor power	kW	11/15	11/15
Spindle output torque	N.m	52.5/95.5	52.5/95.5

G-V Series | Three-linear Guide Double Column Machining Center

Belt spindle model

- Movable worktable design with fixed column and crossbeam; X, Y, and Z axes all use linear guides.
- Optionally, the Z-axis can be equipped with T-type ram box guideway.
- Standard equipped with belt driven spindle.



Item	Unit	G-V1018A	G-V1220A/V1225A/V1230A	G-V1630A
X-axis travel	mm	1,800	2,150/2,650/3,200	3200
Y-axis travel	mm	1,100+100 (Tool change travel)	1,500+25 (Tool change travel)	1,800
Z-axis travel	mm	800	800	800
Effective door width	mm	1,160	1,560	1,800
Worktable width	mm	1,000	1,250	1,800
Worktable length	mm	1,800	2,000/2,500/3,000	3,000
Tool holder specifications	/	BT50	BT50	BT50
Max. spindle speed	r/min	6,000	6,000	6,000
Spindle motor power	kW	15/18.5	15/18.5	15/18.5
Spindle output torque	N.m	191/315	191/315	191/315

G-V Series | Three-linear Guide Double Column Machining Center

Gear spindle model

- Movable worktable design with fixed column and crossbeam; X, Y, and Z axes all use linear guides.
- Optionally, the Z-axis can be equipped with T-type ram box guideway
- Standard equipped with gear transmission spindle



Item	Unit	G-V1520B/V1530B/V1540B	G-V2030B/V2040B/V2050B	G-V2540B/V2050B/V2560	G-V3050B/V3060B/V3080B
X-axis travel	mm	2,200/3,200/4,200	3,200/4,200/5,200	4,200/5,200/6,200	5,200/6,200/8,400
Y-axis travel	mm	2,200	2,700	3,200	3,700
Z-axis travel	mm	1,000	1,000	1,000	1,000
Effective door width	mm	1,950	2,450	2,950	3,450
Worktable width	mm	1,500	2,000	2,500	3,000
Worktable length	mm	2,000/3,000/4,000	3,000/4,000/5,000	4,000/5,000/6,000	5,000/6,000/8,000
Tool holder specifications	/	BT50	BT50	BT50	BT50
Max. spindle speed	r/min	6,000	6,000	6,000	6,000
Spindle motor power	kW	15/18.5	22/35	22/35	22/35
Spindle output torque	N.m	807/1,331	790/1,258	790/1,258	790/1,258

G-R Series | Z-axis Square Ram Box Guideway Double Column Machining Center

- Movable worktable design with fixed column and crossbeam; the X and Y axes are linear guide rails, and the Z axis is square ram box guideway.
- Equipped with a gear spindle as standard.




Item	Unit	G-R2680H	G-R3080H	G-R3580H/R35100H/R35120H/R35160H
X-axis travel	mm	8,500	8,500	8,500/10,500/12,500/16,500
Y-axis travel	mm	3,600	4,400	4,600
Z-axis travel	mm	1,250	1,250	1,250
Effective door width	mm	3,200	3,700	4,200
Worktable width	mm	2,600	3,000	3,500
Worktable length	mm	8,000	8,000	8,000/10,000/12,000/16,000
Tool holder specifications	/	BT50	BT50	BT50
Max. spindle speed	r/min	4,500	4,500	4,500
Spindle motor power	kW	22/26	22/26	22/26
Spindle output torque	N.m	686/811	686/811	686/811

All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.

G-M Series

Moving Column Double Column Machining Center

- Fixed worktable design with movable column and crossbeam; the X and Y axes use linear guide rails, and the Z axis uses square ram box guideway.
- Standard gear spindle.

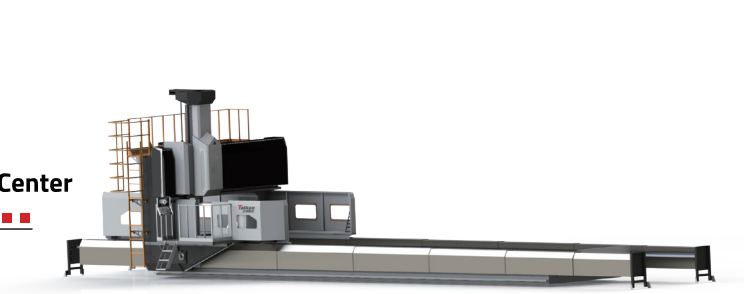

Item	Unit	G-M4080H/M40100H/M40120H/M40160H	G-M5080H/M50100H/M50120H/M50160H
X-axis travel	mm	8,500/10,500/12,500/16,500	8,500/10,500/12,500/16,500
Y-axis travel	mm	5,800	6,800
Z-axis travel	mm	1,500	1,500
Effective door width	mm	5,200	6,200
Worktable width	mm	4,000	5,000
Worktable length	mm	8,000/10,000/12,000/16,000	8,000/10,000/12,000/16,000
Tool holder specifications	/	BT50	BT50
Max. spindle speed	r/min	4,500	4,500
Spindle motor power	kW	22/26	22/26
Spindle output torque	N.m	686/811	686/811

G-B Series

Bridge Type Double Column Machining Center

- Fixed table design with the crossbeam moving along wall-type columns on both sides; the X, Y, and Z axes are all linear guides.
- High-speed motorized spindle is standard.



Item	Unit	G-B2030	G-B2560	G-B3060
X-axis travel	mm	3,200	6,200	6,200
Y-axis travel	mm	2,200	2,700	3,200
Z-axis travel	mm	1,000	1,000	1,000
Effective door width	mm	3,200	3,700	4,200
Worktable width	mm	2,000	2,500	3,000
Worktable length	mm	3,000	6,000	6,000
Tool holder specifications	/	BT50	BT50	BT50
Max. spindle speed	r/min	10,000	10,000	10,000
Spindle motor power	kW	26/45	26/45	26/45
Spindle output torque	N.m	305/623	305/623	305/623

G-VU Series

Fixed Beam Five-Axis Linkage Double Column Machining Center

- Movable worktable design with fixed column and crossbeam; X, Y, and Z axes all use linear guides.
- Standard direct-drive AC fork-shaped swivel head with a Siemens ONE system.



Item	Unit	G-VU1220	G-VU1530	G-VU2030/VU2040/VU2050	G-VU2540/VU2550/VU2560
X-axis travel	mm	2,150	3,200	3,200/4,200/5,200	4,200/5200/6,200
Y-axis travel	mm	2,000	2,700	2,700	3,200
Z-axis travel	mm	800	1,000	1,000	1,000
Effective door width	mm	1,600	2,450	2,450	2,950
Worktable width	mm	1,250	1,500	2,000	2,500
Worktable length	mm	2,000	3,000	3,000/4,000/5,000	4,000/5,000/6,000
Tool holder specifications	/	HSK-A63	HSK-A63	HSK-A63	HSK-A63
Max. spindle speed	r/min	20,000	18,000	18,000	18,000
Spindle motor power	kW	20	30	30	30
Spindle output torque	N.m	35/42	72/85	72/85	72/85

G-BU Series

Bridge Type Five-Axis Linkage Double Column Machining Center

- Fixed table design with the crossbeam moving along wall-type columns on both sides; the X, Y, and Z axes are all linear guides.
- Standard direct-drive AC fork-shaped swivel head with a Siemens ONE system.



Item	Unit	G-BU2030/BU2040	G-BU2540/BU2560	G-BU3060
X-axis travel	mm	3,200/4,200	4,200/6,200	6,200
Y-axis travel	mm	2,200	2,700	3,200
Z-axis travel	mm	1,000	1,000	1,000
Effective door width	mm	3,200	3,700	4,200
Worktable width	mm	2,000	2,500	3,000
Worktable length	mm	3,000/4,000	4,000/6,000	6,000
Tool holder specifications	/	HSK-A63	HSK-A63	HSK-A63
Max. spindle speed	r/min	18,000	18,000	18,000
Spindle motor power	kW	30	30	30
Spindle output torque	N.m	72/85	72/85	72/85

All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.

Engraving Processing Machine

Single-spindle Engraving Processing Machine
Multi-channel Engraving Processing Machine

Multi-spindle Engraving Processing Machine
Dual-spindle Processing Machine

Single-spindle | Engraving Processing Machine

- Single spindle and single worktable, used for metal parts machining.
- Application: Precision machining of aluminum alloy and stainless steel parts; Precision machining of copper electrodes and small copper molds.



Item	Unit	C-400E	C-550E	C-650	C-M650	C-870
Table size	mm	400×400	550×500	600×500	600×500	800×700
X/Y/Z axis travel	mm	400/400/150	550/450/200	600/500/260	600/500/260	700/800/320
Spindle	r/min	40,000	36,000	24,000	30,000	24,000
Tool holder specifications	/	ISO 20	HSK-E32	BT30	HSK-E40	BT30
Tool magazine	PCS	15	16	12	16	12

Single-spindle | Engraving Processing Machine

- Single spindle and single worktable, used for non-metallic parts machining.
- Application: grinding of glass products such as TFT glass and automotive glass; fine carving of TV frames and large plate parts; fine carving and grinding of brittle and hard materials such as glass, ceramics, and sapphire.



Item	Unit	B-400E	B-550E	B-850E	B-1580
Table size	mm	400×400	550×450	850×600	1,500×800
X/Y/Z axis travel	mm	400/400/150	550/450/200	800/600/150	1,500/800/220
Spindle	r/min	40,000	36,000	36,000	36,000
Tool holder specifications	/	ISO 20	HSK-E32	HSK-E32	ISO 25
Tool magazine	PCS	10	13	13	10

Multi-channel | Engraving Processing Machine

- Multiple X/Y/Z axis designs, multiple independent machining units, different channels can be operated independently, and controlled by a set of CNC systems.
- Applications: milling, drilling, and tapping of 3C products; machining of small plates, discs, and shells in industries such as 5G, auto parts, small molds, and medical devices.



Item	Unit	C-400E-2D	C-400-2D	C-400-3D	C-560-2D	T-500-2D	T-700-2D
Table size	mm	400×400	400×400	420×500	500×600	620×400	400×700
X/Y/Z axis travel	mm	400/400/200	400/400/200	400/400/200	500/600/200	400/500/320	400/700/320
Spindle	r/min	40,000	40,000	36,000	40,000	20,000	20,000
Tool holder specifications	/	ISO 20	ISO 20	ISO25	ISO 20	BT30	BT30
Tool magazine	/	18T×2	18T×2	21T×3	21T×2	21T×2	21T×2

Multi-spindle | Engraving Processing Machine

- Multi-spindle synchronous machining.
- Application: Precision machining of small aluminum alloy parts such as mobile phone camera brackets, buttons, volume buttons, etc.



Item	Unit	C-700-2	C-800E-2	C-800E-3	C-800E-4
Table size	mm	700×500	840×500	840×500	840×500
X/Y/Z axis travel	mm	350/500/150	420/500/150	280/500/150	210/500/150
Spindle	r/min	60,000	60,000	60,000	60,000
Tool holder specifications	/	T11	T11	T11	T11
Tool magazine	/	12T×2	25T×2	25T×3	25T×4

Multi-spindle | Engraving Processing Machine

- Multi-spindle synchronous machining.
- Application: Precision machining of small aluminum alloy parts such as mobile phone camera brackets, buttons, volume buttons, etc.




Item	Unit	C-1100-2	C-1100-3	C-1100-4	C-1200-4	C-1200-6
Table size	mm	1,100×500	1,100×500	1,100×500	1,200×500	1,260×500
X/Y/Z axis travel	mm	520/500/150	380/500/150	280/500/150	300/500/200	210/450/150
Spindle	r/min	36,000/30,000	36,000/30,000	36,000/30,000	30,000	60,000
Tool holder specifications	/	ISO25/BT30	ISO25/BT30	ISO25/BT30	BT30	T11
Tool magazine	PCS	16T×2/21T×2	16T×3/21T×3	16T×4/21T×4	16T×4/21T×4	20T×6

Dual-spindle | Processing Machine

- Double-head double tool magazine single worktable, dual spindle synchronous machining, can effectively improve processing efficiency and reduce floor space.
- Application: Machining of small plates, discs, and shells in 5G, 3C industry, automotive parts, medical equipment and other fields.

Item	Unit	T-5040-2	T-6050-2
Table size	mm	1,200×400	1,400×500
X/Y/Z axis travel	mm	500/400/320	600/500/600
Spindle	r/min	20,000	12,000
Tool holder specifications	/	BT-30	BT-40
Tool magazine	PCS	Swash plate type 21T×2	Arm type 24T×2

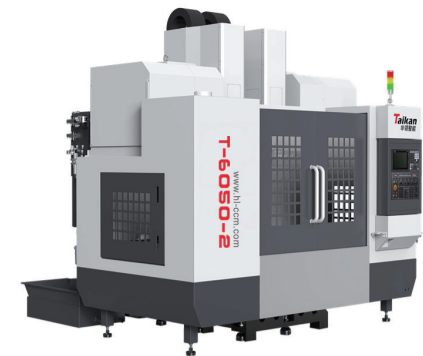

All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.

CNC Lathe

L-M Series CNC turning(milling) compound
L-Y Series CNC turning(milling) compound
L-H Series CNC Horizontal Lathe

L-P Series CNC Horizontal Lathe
D-VL Series CNC Vertical Lathe

L-M Series | High Precision CNC Horizontal Turning(Milling) Compound

- Equipped with BMT45 / BMT55 power turret and hydraulic sleeve tailstock with live center structure.
- Mechanical spindle as standard,motorized spindle as optional, spindle with C-axis indexing function and hydraulic brake assist system.
- 30° overall inclined bed, feed axis uses linear guide.

Item	Unit	L-25M	L-35M	L-35MP	L-45M	L-45MP
Chuck size	inch	6"	8"	8"	10"	10"
Max. swing diameter on bed	mm	Ø 520	Ø 520	Ø 600	Ø 600	Ø 600
Max. machining diameter (shaft/disc)	mm	Ø 200 / Ø 250	Ø 300 / Ø 350	Ø 380 / Ø 450	Ø 380/ Ø 450	Ø 380 / Ø 450
Max. machining length	mm	400	400	900	400	900
Spindle head type	mm	A2-5	A2-6	A2-6	A2-8	A2-8
Max. spindle speed	r/min	5,300	4,000	4,000	2800	2500
Turret type and tool capacity	/	BMT45/12	BMT45/12	BMT55/12	BMT55/12	BMT55/12



L-Y Series | High Precision CNC Horizontal Turning(Milling) Compound With Y Axis

- 30° overall inclined bed, linear guide rails for XZ axis and box guideway for Y axis.
- Mechanical spindle as standard, motorized spindle as optional, spindle with C-axis indexing function and hydraulic brake assist system.
- Equipped with BMT45 / BMT55 power turret (including Y axis), and hydraulic sleeve tailstock with live center structure.

Item	Unit	L-25Y	L-35Y	L-35YP	L-45YP
Chuck size	inch	6"	8"	8"	10"
Max. swing diameter on bed	mm	Ø 480	Ø 520	Ø 600	Ø 600
Max. machining diameter (shaft/disc)	mm	Ø 300 / Ø 350	Ø 300 / Ø 350	Ø 380 / Ø 450	Ø 380 / Ø 450
Max. machining length	mm	330	330	400	900
Spindle head type	mm	A2-5	A2-6	A2-6	A2-8
Max. spindle speed	r/min	6,000	4,000	4,000	4500
Turret type and tool capacity	/	BMT45/12	BMT55/12	BMT55/12	BMT55/12



Equipped with dual motorized spindles and dual power turrets (including Y-axis).



Item	Unit	L-46SDY1	L-46SDY2	L-52SDY1
Max. swing diameter on the bed	mm	Ø 570	Ø 570	Ø 570
Max. swing diameter on the saddle	mm	Ø 320	Ø 320	Ø 320
Max. turning diameter	mm	Ø 130	Ø 130	Ø 130
Max. turning length	mm	130	130	130
Spindle chuck size	inch	6"	6"	8"
Max. spindle speed	r/min	6,000	6,000	4,500
Max. sub-spindle speed	r/min	5,000	5,000	6,000
Max. power tool speed	r/min	4,500	45,00	4,500
Turret type	/	BMT45	BMT45	BMT45

L-H Series | High Precision CNC Horizontal Lathe

Turret Lathe

- 30° integrated high-rigidity inclined bed structure, X/Z axis adopts heavy-duty roller guide rails
Equipped with mechanical turning spindle, 12-bit servo turret

Item	Unit	L-25H	L-35H	L-35HP	L-45H	L-45HP
Chuck size	inch	6"	8"	8"	10"	10"
Max. swing diameter on bed	mm	Ø 500	Ø 520	Ø 600	Ø 600	Ø 600
Max. machining diameter (shaft/disc)	mm	Ø 200 / Ø 250	Ø 300/ Ø 350	Ø 380/ Ø 450	Ø 380/ Ø 450	Ø 380 / Ø 450
Max. machining length	mm	450	450	1,000	450	1,000
Spindle head type	mm	A2-5	A2-6	A2-6	A2-8	A2-8
Max. spindle speed	r/min	6,000	4,000	4,000	2,800	2,800
Turret type and tool capacity	PSC	Servo/12	Servo/12	Servo/12	Servo/12	Servo/12



L-P Series | High Precision CNC Horizontal Lathe Gang Tool

- The tool holder is in the form of a dovetail slot tool holder or a T-slot tool holder

Item	Unit	L-P20G	L-P30G	L-P36G	L-P46G
Max. swing diameter on the bed	mm	Ø 240	Ø 240	Ø 420	Ø 420
Max. turning length	mm	1,000	1,000	330	330
Max. turning diameter	mm	Ø 100	Ø 100	Ø 300	Ø 300
Spindle head clamping form	mm	Ø 20mm Spring chuck	Ø 30mm Spring chuck	5" Hollow Collet	6" Hollow Collet
Max. spindle speed	r/min	6,000	6,000	6,000	6,000
Tool holder form	/	Gang Tool	Gang Tool	Full Gang Tool	Full Gang Tool
Quantity	PCS	-	-	7	7



D-VL Series | High Precision CNC Vertical Lathe

- The vertical structure avoids the roundness error caused by the gravity of the workpiece during horizontal clamping, ensuring the roundness accuracy of the parts.

Item	Unit	D-VL500	D-VL650	D-VL800	D-VL1250C	D-VL1600C
Max. swing diameter	mm	Ø 650	Ø 800	Ø 950	Ø 1,400	Ø 1,800
Max. turning diameter	mm	Ø 500	Ø 650	Ø 800	Ø 1,250	Ø 1,600
Max. workpiece height	mm	500	600	800	Ø 1,000	Ø 1,000
Chuck diameter	Inch	12" (Hydraulic chuck)	15" (Hydraulic chuck)	18" (Hydraulic chuck)	Ø 1100 mm (Worktable)	Ø 1400 mm (Worktable)
Spindle speed range	r/min	50~2,500	50~2,500	50~2,500	3.15 ~ 400	2.15 ~ 315
Turret type	PCS	8-bit hydraulic turret	8-bit hydraulic turret	8-bit hydraulic turret	8-bit ATC	8-bit ATC
Control system	/	Siemens 828D	Siemens 828D	Siemens 828D	Siemens 828D	Siemens 828D



All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.

CNC Slitting Lathe

ST Series CNC Slitting Lathe
TQ Series CNC Slitting Lathe
L-S Series CNC Slitting Lathe

ST Series

CNC Slitting Lathe

Single Spindle, 3 axes

- 3 linear feed axes.
- Single spindle with single system, the spindle adopts built-in motorized spindle.
- Interchangeable with and without guide sleeve.
- The tool layout is rich, with good expansibility.
- Mitsubishi system secondary development. cold and hot machine compensation screen.

Item	Unit	ST-203 Single spindle, 3 axes	ST-263 Single spindle, 3 axes	ST-323 Single spindle, 3 axes
Max. machining diameter	mm	Ø 20	Ø 26	Ø 32
Max. machining length	mm	Max. 240	Max. 240	Max. 240
Front drilling diameter	mm	Max. Ø 10	Max. Ø 10	Max. Ø 13
Front thread machining	mm	Max.M8	Max.M8	Max.M8
Control system	/	Mitsubishi E80	Mitsubishi E80	Mitsubishi E80



ST Series

CNC Slitting Lathe

Double Spindles, 5 axes

- 5 linear feed axes.
- Dual spindles and dual systems, the spindle adopts mechanical spindle or motorized spindle.
- The tool layout is rich, with good expansibility.
- Interchangeable with and without guide sleeve.
- Mitsubishi system secondary development. cold and hot machine compensation screen.

Item	Unit	ST-205 Double spindles 5 axes	ST-265 Double spindles 5 axes	ST-325 Double spindles 5 axes	ST-385 Double spindles 5 axes
Max. machining diameter	mm	Ø 20	Ø 26	Ø 32	Ø 38
Max. machining length	mm	Max. 240	Max. 240	Max. 240	Max. 240
Front drilling diameter	mm	Max. Ø 10	Max. Ø 10	Max. Ø 13	Max. Ø 13
Front thread machining	mm	Max.M8	Max.M8	Max.M8	Max.M8



ST Series

CNC Slitting Lathe

Double spindles, 6 axes

- 6 linear feed axes.
- Dual spindles and dual systems, the spindle uses a built-in motorized spindle.
- 5 power tools, 5 end face hole tools.
- Without guide sleeve, with guide sleeve, interchangeable.

Item	Unit	ST-206 Double spindles, 6 axes	ST-266 Double spindles, 6 axes	ST-326 Double spindles, 6 axes	ST-386 Double spindles, 6 axes
Max. machining diameter	mm	Ø 20	Ø 26	Ø 32	Ø 38
Max. machining length	mm	Max. 240	Max. 240	Max. 240	Max. 240
Front drilling diameter	mm	Max. Ø 10	Max. Ø 10	Max. Ø 13	Max. Ø 13
Front thread machining	mm	Max.M8	Max.M8	Max.M8	Max.M8
Control system	/	Mitsubishi M80 LA	Mitsubishi M80 LA	Mitsubishi M80 LA	Mitsubishi M80 LA

TQ Series

CNC Slitting Lathe

- Dual spindle and dual system design, with both main and sub-spindles equipped with motorized spindles. The system uses the Mitsubishi M80 control system.
- Capable of simultaneous front and back machining.
- Optional guide sleeve-free device, suitable for high-precision machining of short workpieces

Item	Unit	TQ-125I Double spindles 5 axes	TQ-125II Double spindles 5 axes	TQ-126I Double spindles 6 axes	TQ-205I Double spindles 5 axes	TQ-205II Double spindles 5 axes	TQ-206I Double spindles 6 axes
Max. machining diameter	mm	Ø 12			Ø 20		
One-time feeding length	mm	Synchronous guide sleeve 130mm Fixed guide sleeve 300mm			Synchronous guide sleeve 130mm Fixed guide sleeve 300mm		
Front drilling diameter	mm	Max. Ø 8			Max. Ø 10		
Front thread machining	mm	Max.M6			Max.M8		
Control system	/	Mitsubishi M80			Mitsubishi M80		



L-S Series

CNC Slitting Lathe

Item	Unit	L-S205/L-S206
Max. machining diameter	mm	Ø 12
Max. machining length	mm	140(direct connection)/180(electric)
Front drilling diameter	mm	Max. Ø 13
Front thread machining	mm	Max.M8
Control system	/	FANUC Oi-TF PLUS(5)



All pictures and parameter configurations in this album are for reference only. The products delivered shall prevail. Our products are being constantly upgraded, and the above information is subject to change without prior notice.